


- NOTES:
1. MAXIMUM LENGTH OF STRAIGHT CURB STONES = 8'
 2. MINIMUM LENGTH OF STRAIGHT CURB STONES = 3'
 3. GROUT OR CAULK ALL CURB JOINTS OVER 1/4" IN WIDTH. INSTALL STRIP OF FILTER FABRIC BEHIND EACH CURB JOINT.

A VERTICAL GRANITE CURB INSTALLATION DETAIL
N.T.S.



B BITUMINOUS SIDEWALK WITH VERTICAL GRANITE CURB DETAIL
N.T.S.

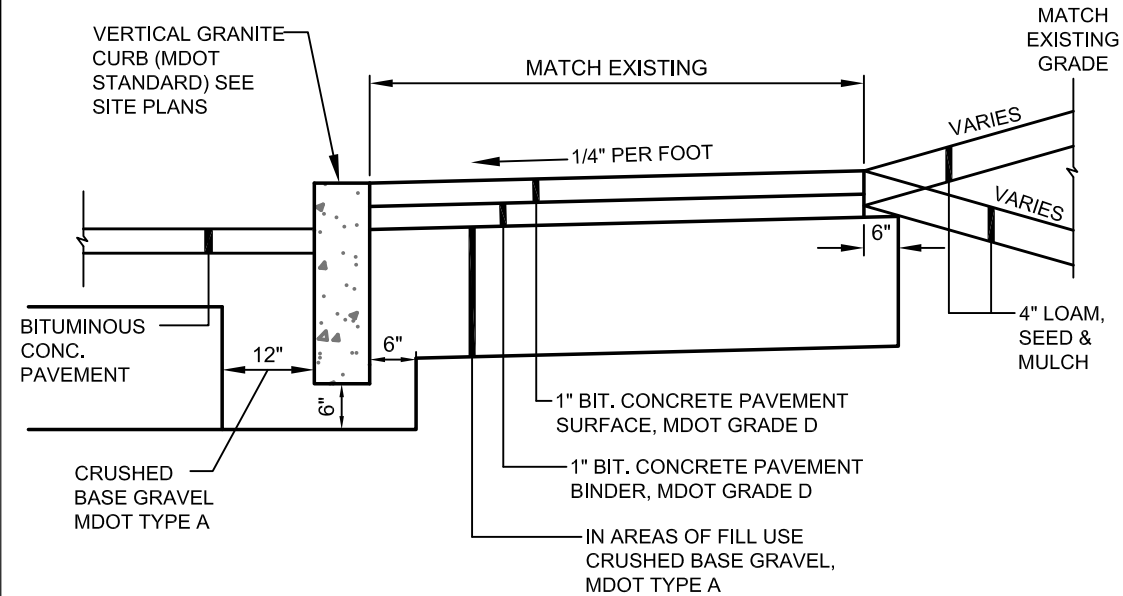

DeLuca-Hoffman Associates, Inc.
778 MAIN STREET, SUITE 8
SOUTH PORTLAND, ME 04106
(207) 775-1121
DHAI@DELUCAHOFFMAN.COM

DRAWN:	DMB	DATE:	JULY 2011
DESIGNED:	OSC	SCALE:	N.T.S.
CHECKED:	DDA	JOB NO.	2146.19
FILE NAME:	2146.19-SP		

RSU #14
WINDHAM SCHOOL CAMPUS

GRAVEL PARKING NORTHEAST OF FIELD #10
DETAILS

FIGURE

4